



Underglass Awning

markilux 779 / 779 tracfix

The perfect underglass awning for large areas. The angular frame design throughout emphasizes design emphasizes the lines of each and every glass canopy.



reddot design award
winner 2017



GERMAN
DESIGN
AWARD
WINNER
2018

markilux.com

markilux


safe timeless beautiful

Product characteristics

Wind resistance class 2 | 3 (depending on size)
 Beaufort 5 → 28–37 km/h → 7.5–10.4 m/s → 17–23 mph
 Beaufort 6 → 38–48 km/h → 10.5–13.4 m/s → 24–30 mph




1 side view, motor operation, flat track brackets

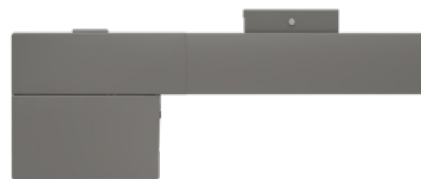


1 side view, manual operation with crank handle




2 cable feed system in lighting units

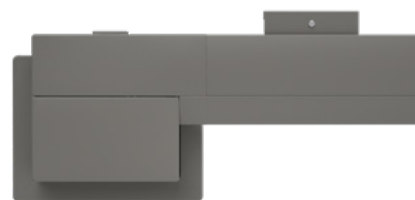


3 shadeplus during extension

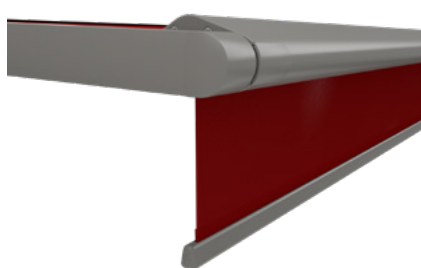


4 tracfix cover guidance – no gap between cover and track ¹⁾

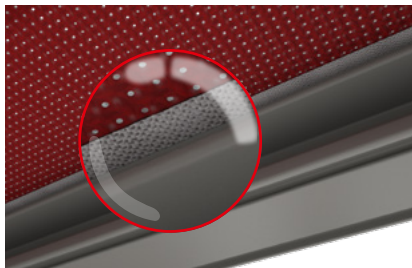

5 front profile finishes flush with the ends of the guide tracks

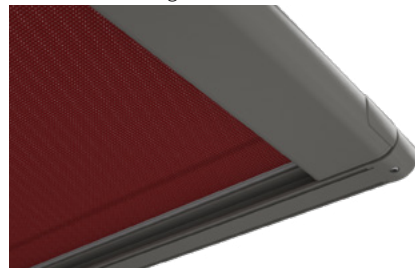


6 LED-Line fitted to the guide track and cover support tube ¹⁾

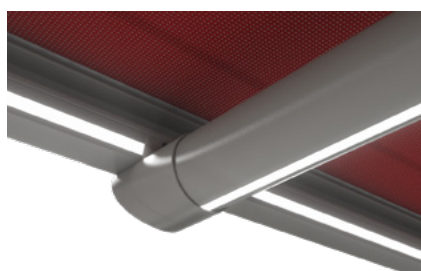

7 LED-Line fitted to the guide track and LED-Spots in the cover support tube ¹⁾



8 LED-Line fitted to the guide track ¹⁾, cover support by means of a stainless steel wire

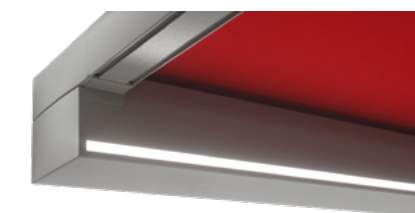

1) optional configuration

Product characteristics

Description

- underglass awning with cleanly designed, quadratic cassette and harmoniously matched, angular guide tracks. The ingenious tensioning system and the sturdy design allow areas of up to 27 m² to be shaded.

Special features

- fully encompassing cassette that protects the cover perfectly
- the tried and tested tensioning system – with drive belts and integrated gas pistons – delivers optimum cover tension in any phase of extension
- tracfix optional: the continuous lateral cover guidance system that leaves no gap between the cover and guide tracks – gives improved wind stability and a cleaner appearance
- various lighting combinations available: light strip LED-Line in the guide tracks, LED-Line in the cover support tube or LED-Spots fitted to the cover support tube – individually configurable lighting options providing a pleasant atmosphere in the evening
- option of a drop valance with a height of 150 cm or 210 cm (depending on the fabric series chosen) – protection against low-lying sun, wind and inquisitive glances integrated into the front profile, with manual operation
- the broad range of brackets with patented clip-on system offers individual fixture solutions

Dimensions

- single unit: 60 cm – 600 cm in width, maximum extension 600 cm (depending on the width)
- maximum dimensions, width × extension: 400 cm × 600 cm / 600 cm × 450 cm (without tracfix system)
- maximum dimensions, width × extension: 600 cm × 400 cm (with tracfix system)
- intermediate sizes are available

Roller tube and lateral bearings

- round roller tube Ø 85 mm with keyway, galvanised steel – excellent stability, ensures near perfect cover performance even at the largest widths
- the roller tube bearing is made of stainless steel

Awning profiles

- extruded aluminium, in façade quality, powder coated
- cassette profile in two pieces, round, height × depth 125 mm × 125 mm
- guide tracks angular, rounded edges, width × height 52 mm × 52 mm
- front profile rounded at the front, height × depth 110 mm × 52 mm, shadeplus profile height × depth 139 mm × 66 mm

Side caps

- the cassette end caps are made of die-cast aluminium, in two parts, powder coated
- the front profile end caps are made of high-quality plastic, powder coated

Fixture brackets

- extruded aluminium, powder coated
- cassette is self-supporting on guide tracks
- brackets for the guide tracks: flat track brackets, stand-off brackets, reveal fixture
- standard bracket heights: 20 mm / 85 mm / 105 mm / 145 mm (bespoke heights can be ordered)
- other accessories are available

Frame colours

markilux frame colours without surcharge

traffic white RAL 9016



metallic aluminium RAL 9006




grey brown, similar to RAL 8019



off-white textured finish, 5233 ¹⁾



stone grey metallic, 5215 ¹⁾

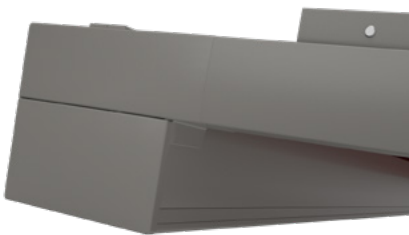

anthracite metallic, 5204 ¹⁾



Havana brown textured finish, 5229 ¹⁾



18

Non-standard powder-coated finish

Bespoke frame colours at a surcharge – matt, metallic and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

1) textured finish

Colours may differ slightly from those depicted in both hue and finish.

Dimensions and configuration options

Single unit

		Awning fixture width										Minimum fixture width	
		150	200	250	300	350	400	450	500	550	600		
Order		60	151	201	251	301	351	401	451	501	551	Hard-wired motor	Radio-controlled motor
dimensions		150	200	250	300	350	400	450	500	550	600		
Overall width		+ 5.4										60 [72]	70 [82]
H	150 ¹⁾												
	200 ¹⁾												
	250 ¹⁾										2)		
	300 ¹⁾								2)	2)	2)		
	350 ¹⁾						2)	2)	2)	2)	2)		
	400 ¹⁾	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)		
	450	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)		
	500	2)	2)	2)	2)	2)	2)	—	—	—	—		
	550	2)	2)	2)	2)	2)	2)	—	—	—	—		
	600	2)	2)	2)	2)	2)	2)	—	—	—	—		

dimensions in cm

- 1) = tracfix (optional). Only with motor drive
 2) = wind resistance class 2,
 all other sizes meet wind resistance class 3
 3) = from an extension of 281 cm
 H = extension
 [...] = dimensions in the case of tracfix units

	= 2 brackets
	= 3 brackets
	= 3 brackets, 1 stainless steel cover support wire

Operation	standard	optional
crank handle	✓ ¹⁾	—
hard-wired motor	✓ ²⁾	—
silentec motor (optionally with an external io / RTS receiver) ¹⁾	—	—
radio-controlled motor io, 868 MHz	—	✓
radio-controlled motor RTS, 433 MHz	—	✓
radio-controlled motor RTS, 433 MHz with manual override ¹⁾	—	—

- 1) not available in tracfix units
 2) in tracfix units

Coupled Awning

not available

Shadeplus / drop valance	standard	optional
height depends on the fabric series, see table "shadeplus / drop valance cover"		
minimum awning fixture width 201 cm, maximum 500 cm		
crank handle	✓	—
hard-wired motor	—	—
radio-controlled motor io, 868 MHz	—	—
radio-controlled motor RTS, 433 MHz	—	—

Optional accessories

tracfix – eliminates gap between cover and guide track
manual drop valance
LED-Line in the guide tracks on both sides
LED-Line in the cover support tube ¹⁾
LED-Spots in the cover support tube ¹⁾
LED-Spots in the cassette
infrared heater 2000 W / 2500 W
infrared heater 2500 W with integrated radio-controlled receiver 868 MHz io
automatic controls (light, wind, rain)

N.B! Important background information can be found in the chapter "Optional Accessories".

- 1) LED-Line and LED-Spotlights cannot be combined with one another

Awning cover	fabric range no.	standard	optional	fixture width		unit height		cover manufacture	
sunvas	301.. / 309..-315..	✓	—			≤ 450		LN	
				≤ 600		≤ 400		LN	
sunsilk	324.. / 325.. / 328.. / 369..	✓	—			≤ 450		LN	
				≤ 600		≤ 400		LN	
perfotex	331.. / 332..	✓	—			≤ 400		LN	
				≤ 600		≤ 400		LN	
sunvas (250 cm)	31008, -09, -13, -16, -18, -25, -27, -28, -31, -36, -37, -57, -58, 31109, -14, -17	✓	—	≤ 250	≤ 250			N	N
				≤ 400	≤ 400	≤ 243	≤ 243	N	N
				≤ 400	≤ 400	≥ 244	≥ 244	QN	QN
				≤ 400	≤ 400	≤ 243	≤ 243	N	N
transolair	338..	—	✓	≤ 400		≥ 244		QN	
				≤ 400		≥ 244 ≤ 400		QN	
				≥ 401 ≤ 550		≤ 400		LN	
				≤ 600		≤ 350		LN	
transolair (120 cm)	339..	✓	—			≤ 450		LN	
				≤ 600		≤ 400		LN	
				≤ 320				N	
				≤ 400		≤ 313		N	
sunvas (320 cm)	31008, -09	✓	—	≤ 400		≥ 314		QN	
				≤ 320				N	
				≤ 400		≤ 313		N	
				≤ 400		≥ 314		QN	
vuscreen Alu	317..	—	✓	≤ 400		≤ 243		N	
				≤ 400		≥ 244 ≤ 400		QN	
				≥ 401		≤ 250		N	
				≤ 400		≤ 243		N	
Soltis Perform 92	92-20..	—	✓	≤ 185		≤ 300		N	
				≤ 400		≤ 194		N	
				≥ 186 ≤ 400		≥ 195 ≤ 300		QN	
				≤ 185		≤ 300		N	
				≤ 400		≤ 194		N	
				≥ 186 ≤ 400		≥ 195 ≤ 300		QN	

perla and perla FR	370.. und 374.. / 375..	—	—						
shadeplus / drop valance cover ¹⁾	fabric range no.	standard	optional	fixture width		unit height		cover manufacture	
sunvas	309.. / 310.. / 311..	✓	—	≤ 500		210		QN	
sunsilk	324.. / 325..	✓	—	≤ 500		210		QN	
transolair	338..	—	✓	≤ 500		210		N	
transolair (120 cm)	339..	—	✓	≤ 500		210		QN	
vuscreen Alu	317..	—	✓	≤ 500		150		N	
Soltis Perform 92	92-20..	—	✓	≤ 500		210		QN	
glass fibre screen	272..	—	—						
perfotex	331.. / 332..	—	—						
perla	370..	—	—						
perla FR	374.. / 375..	—	—						

 = tracfix

1) = the width of the awning cover is narrower than that of the awning.

N = seamless


Only available in plain seamless fabrics (oversized, fabric width > 120 cm) or in plains with a horizontal joint (fabric width 120 cm)

LN = vertical seam(s), panel width usually 120 cm

QN = horizontal seam(s)

dimensions in cm

Lighting options

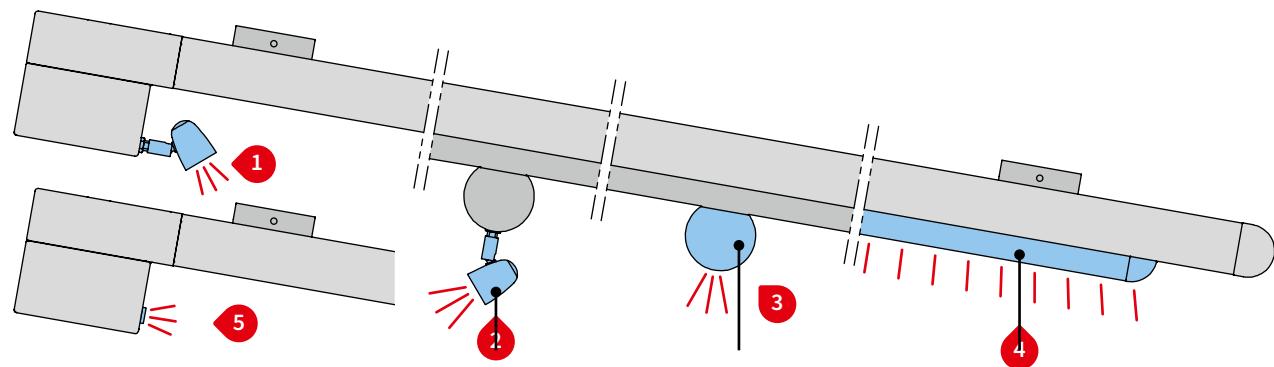

Lighting options

- 1 LED-Spots in the cassette
- 2 LED-Spots in the cover support tube ¹⁾
- 3 LED-Line in the cover support tube ¹⁾
- 4 LED-Line in the guide tracks on both sides

For combination possibilities please view section “Dimension overview lighting options”


1) LED-Line and LED-Spotlights cannot be combined with one another

Control

	standard	optional
on/off switch	—	✓
radio-controlled dimmer io 868 MHz	✓	—
radio-controlled dimmer RTS 433 MHz	—	✓

Distribution of the LED-Spots

1 and 2 in the cassette and in the cover support tube

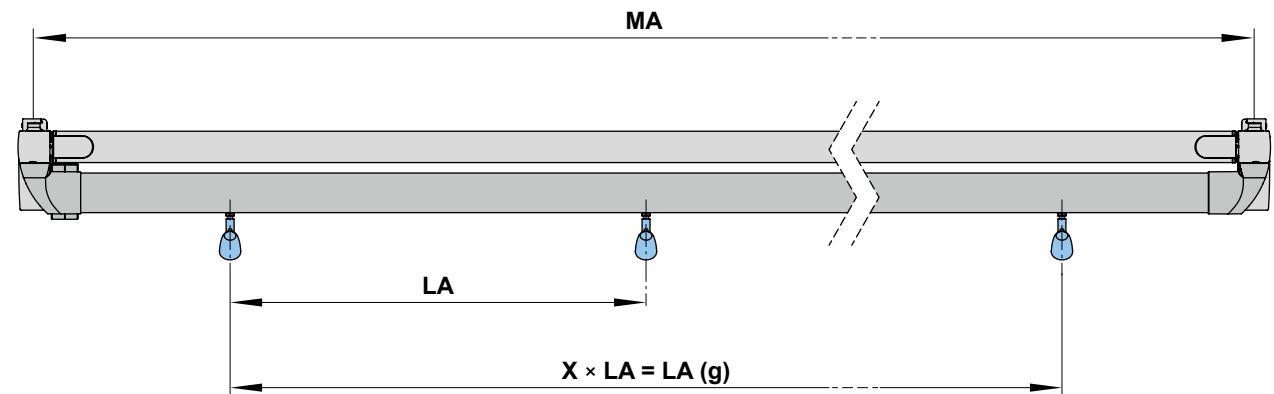

Awning fixture width	No. of spotlights	LA	LA (g)
150–250	3	65	130
251–300	3	98	196
301–350	3	98	196
351–400	4	98	294
401–450	4	98	294
451–500	5	98	392
501–550	5	98	392
551–600	6	98	490


dimensions in cm

LA (g) = distance between the spotlights (total)
MA = order dimension = awning fixture width = fixture width

1 and **2** LED-Spots in the cassette and in the cover support tube

Technical specification


Operating voltage	230 V, 50 Hz
Power output of one LED spotlight	5 W
Light source	LED (12 V)
Number of transformers	1 unit
Light temperature	warm white
IP protection class	IP 44
Service life	approx. 20.000 h

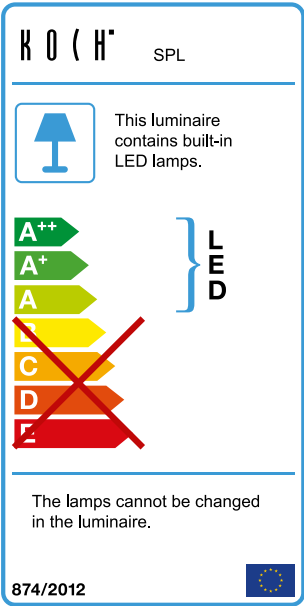















3 and **4** LED-Line in the cover support tube and in the guide tracks

Technical specification


Operating voltage	230 V, 50 Hz
Power output of one LED spotlight	10 W
Light source	LED (12 V)
number of LEDs	120 units / m
Number of transformers	1 unit
Light temperature	warm white
IP protection class	IP 44
Service life	approx. 15.000 h

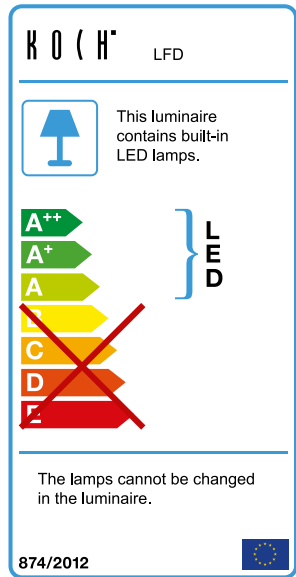

Fixtures, fittings and accessories


 flat track bracket fixture type 10 / 15 78548.	 double track bracket flat 2 single units 73627.	 additional angled bracket for the bearing, gearbox and motor sides fixture type 15 50 × 50 × 80 mm 78719.
 accessories for two angled brackets 78719. 787211	 track bracket with adjustable head fixture type 20 80 mm 73624.	 double track bracket with adjustable head central bracket for 2 single units next to each other 80 mm 73631.
 universal track bracket 80 mm 73629.	 track bracket with adjust- able head fixture type 21 100 mm 76046.	 double track bracket with adjustable head central bracket for 2 single units next to one another 100 mm 73634.
 universal track bracket 100 mm 76054.	 track bracket with adjust- able foot plate 100 mm 76199.	 track bracket with adjustable head fixture type 22 140 mm 76048.
 double track bracket with adjustable head 140 mm 73636.	 cover cap for square track bracket standard accessory for bracket 2 × 76718.	

Fixtures, fittings and accessories




sprung bracket with stainless steel cover support wire
included with the delivery

73639. and 771401




universal track bracket
with adjustable head
140–500 mm

76053.




spacer plate for track bracket
110 × 40 × 10 mm

78570.




adapter plate for track bracket
110 × 60 mm

78158.



adapter plate for track bracket

78165.




spacer plate for double flat track bracket
80 × 40 × 15 mm

73742.

Fixture types


10

Clearance 20 mm

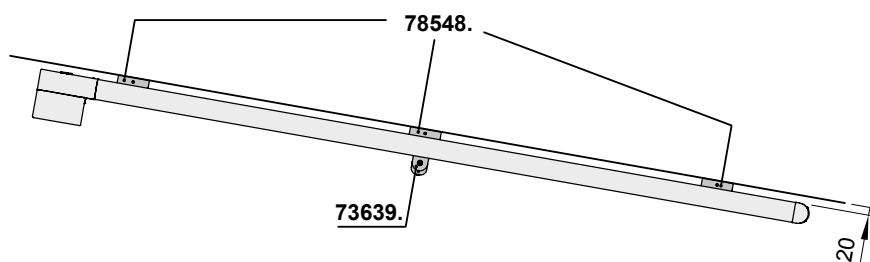


15

By angled bracket
to the side

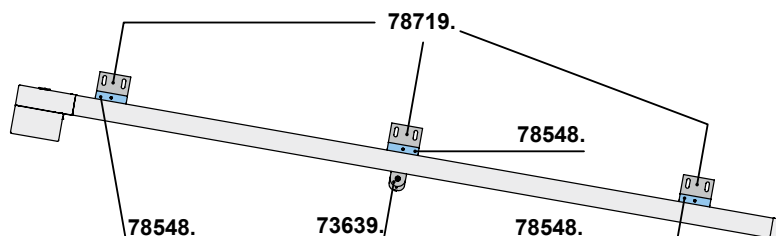


20

Clearance 85 mm

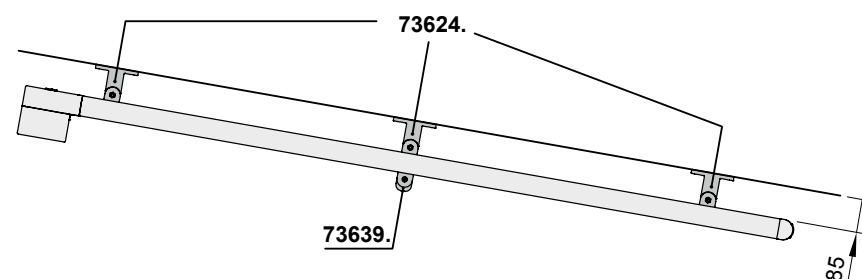


21

Clearance 105 mm

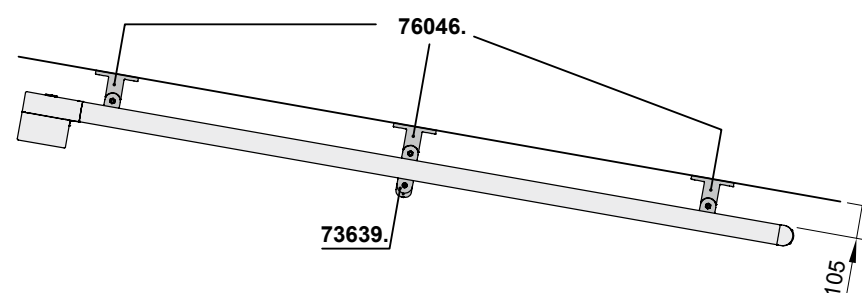

22

Clearance 145 mm

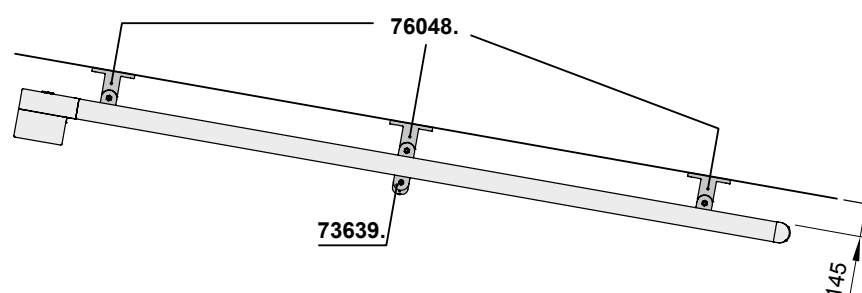

Individual choice of brackets:

see "Fixtures, fittings and accessories". When extension > 300 cm always with 3 brackets per guide track.

During extension and retraction the cover may sag.


Cover support wires and brackets (73639) are only supplied with the markilux 779 without tracfix at certain sizes. A bracket should always be placed where these are positioned.

Fixture types

Dimension overview

Fixture type 10

Fixture types 20, 21 and 22

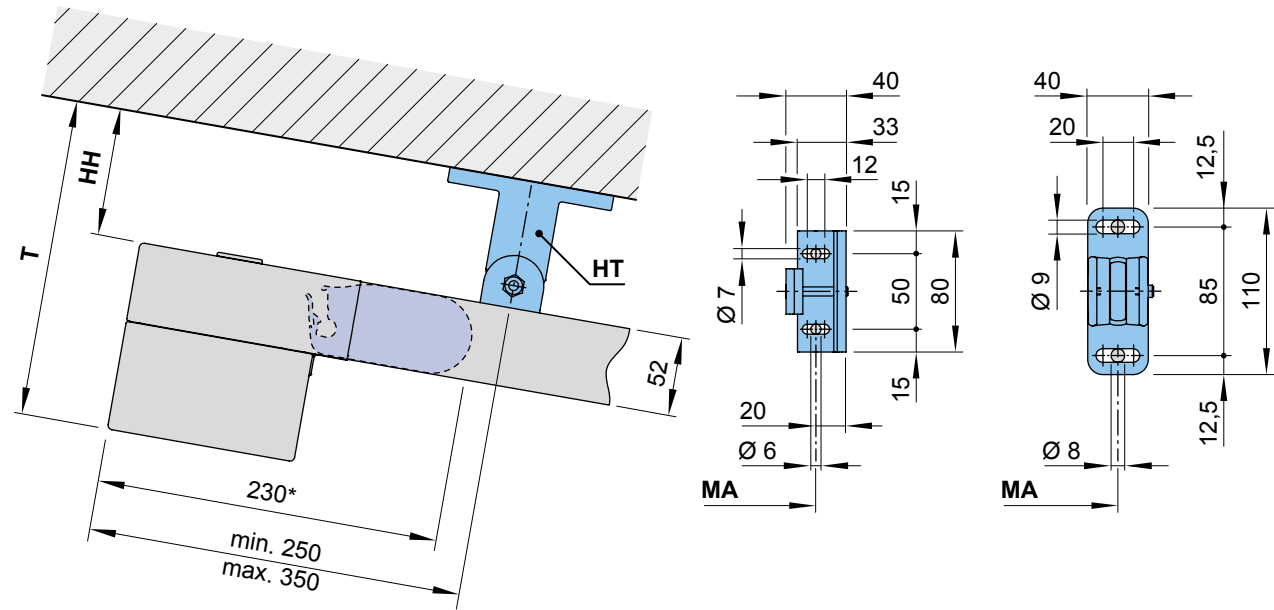


		Fixture type 10	Fixture type 20	Fixture type 21	Fixture type 22
HT	= bracket	78548.	73624.	76046.	76048.
HH	= bracket height	20	85	105	145
T	= overall height	150	215	235	275
MA	= <i>order dimension</i> = awning fixture width = fixture width				
*	= depth of cassette including front profile, retracted				

dimensions in mm

Dimension overview

Single unit

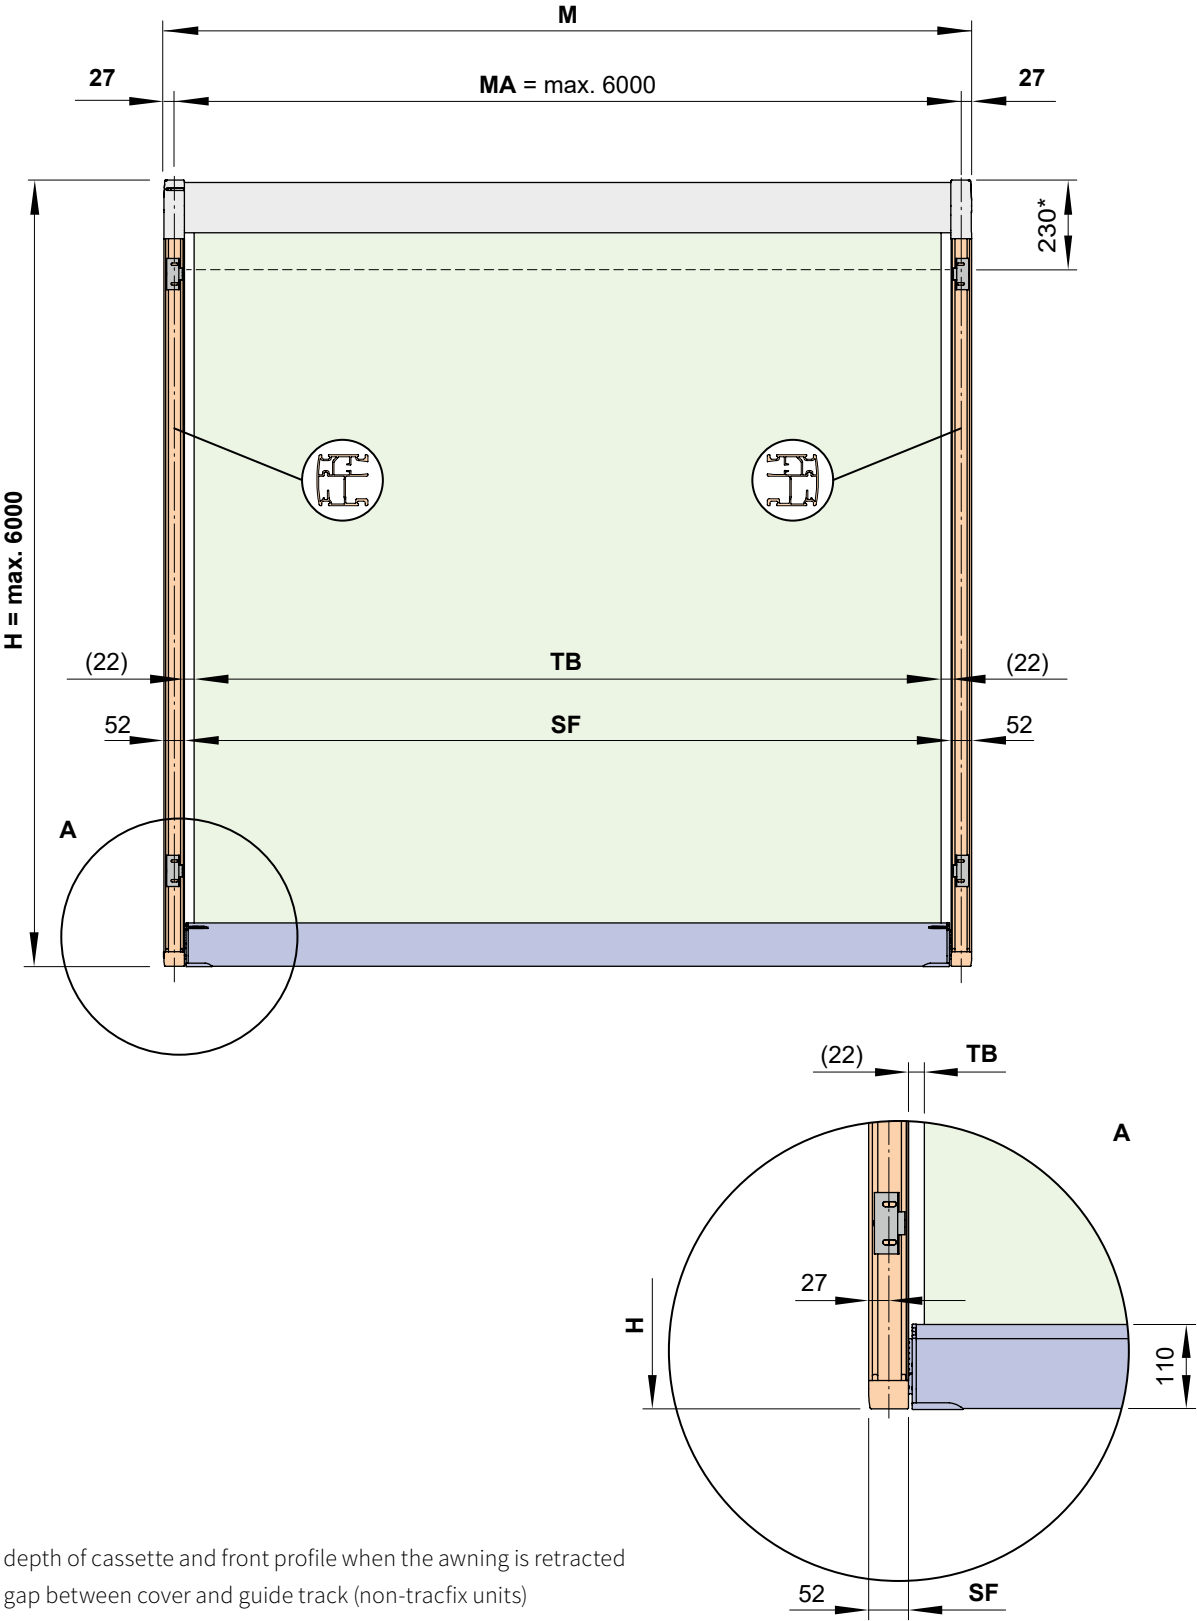


- * = depth of cassette and front profile when the awning is retracted
- (...) = gap between cover and guide track (non-tracfix units)
- H** = *order dimension* = extension
- M** = overall awning width
- MA** = *order dimension* = awning fixture width = fixture width
- TB** = cover width (in non-tracfix systems)
- SF** = visible cover (in tracfix systems)

dimensions in mm

Dimension overview

Two single units – fixture via double track brackets

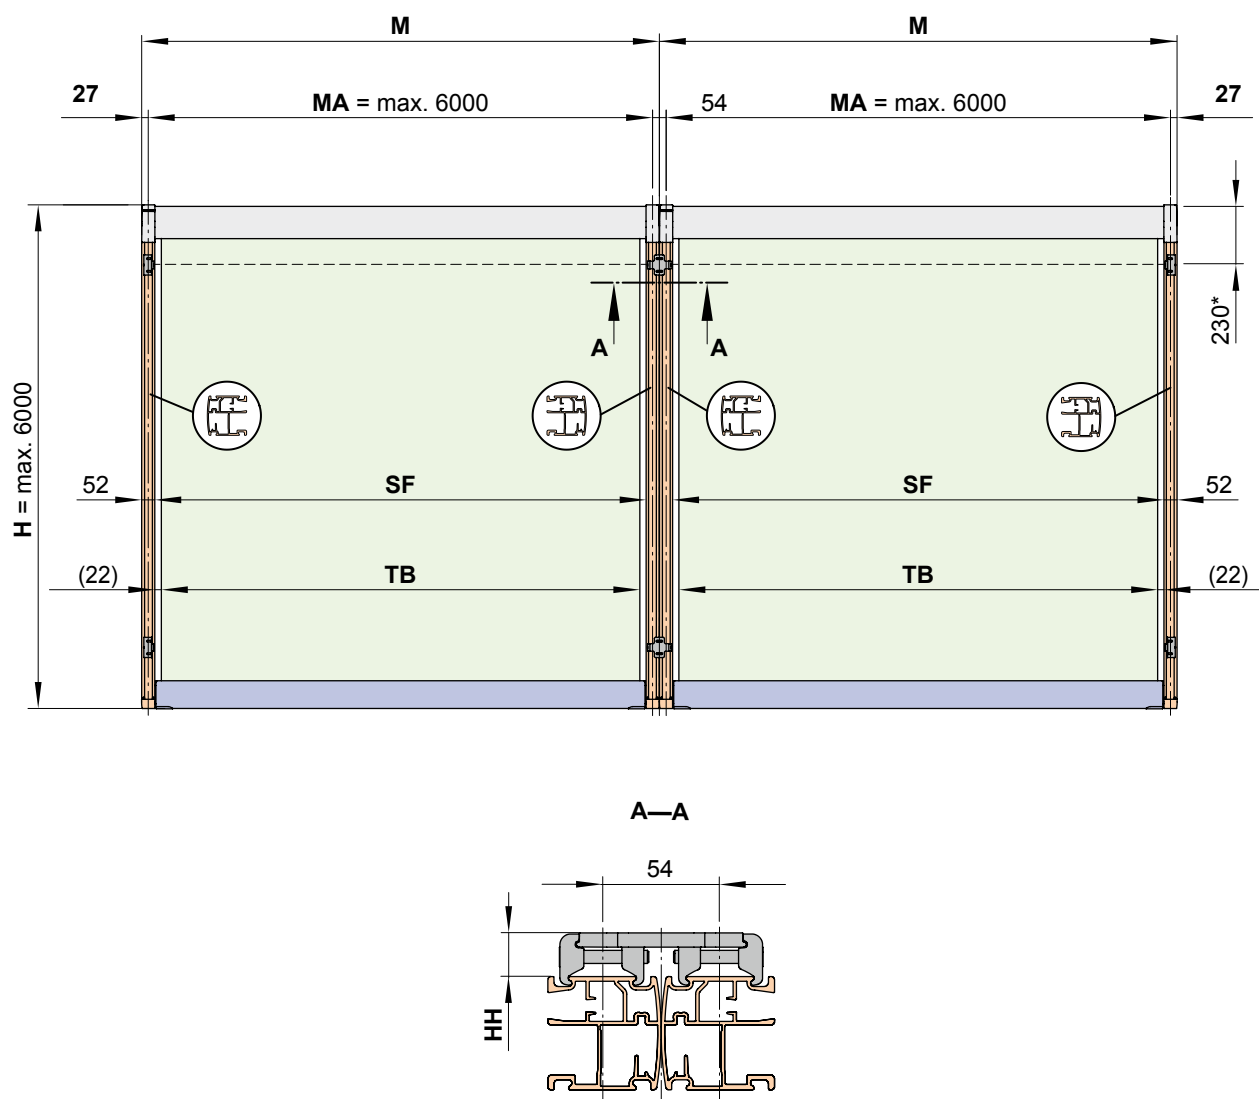

* = depth of cassette and front profile when the awning is retracted

(...) = gap between cover and guide track (non-tracfix units)

H = *order dimension* = extension

HH = bracket height

M = overall awning width


MA = *order dimension* = awning fixture width = fixture width

TB = cover width (in non-tracfix systems)

SF = visible cover (in tracfix systems)

dimensions in mm


Dimension overview fixture type 10

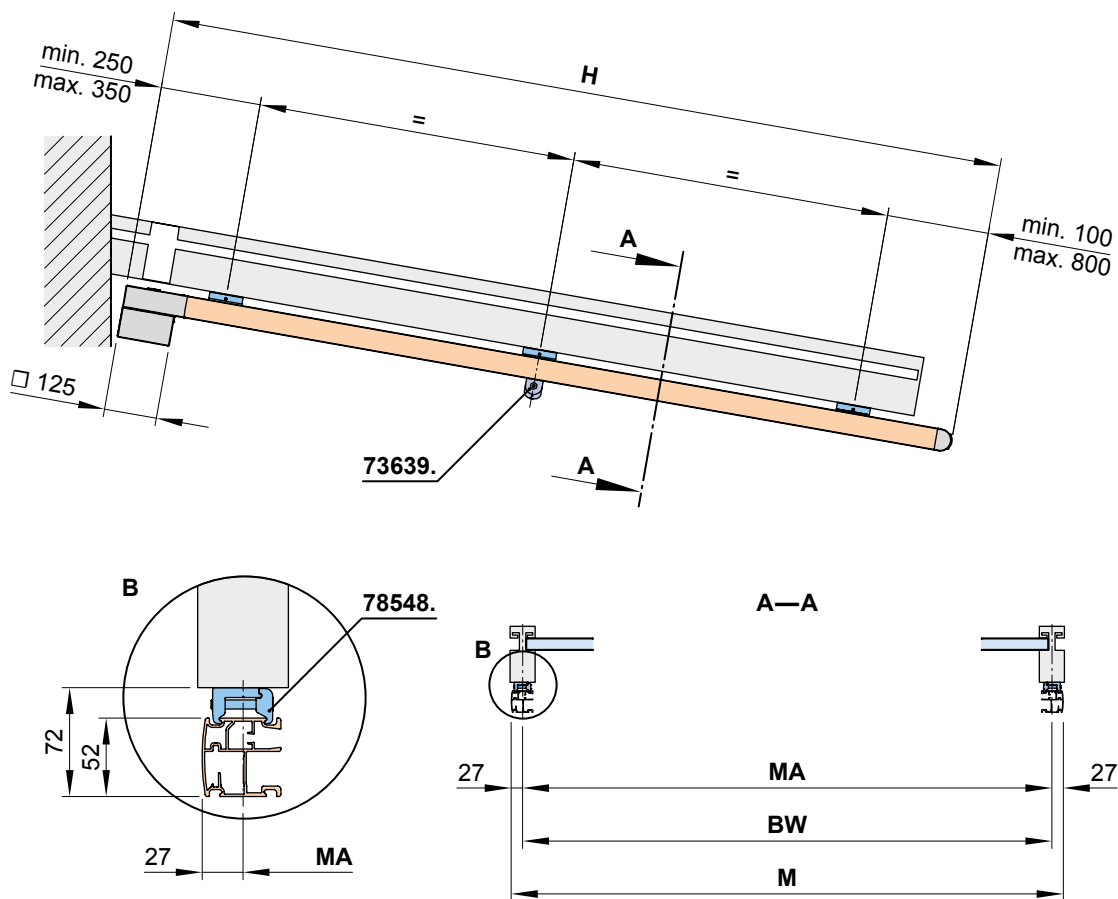

- BW** = width between fixture points on the conservatory
- H** = *order dimension* = extension
- M** = overall awning width
- MA** = *order dimension* = awning fixture width = fixture width

dimensions in mm


Dimension overview fixture type 15

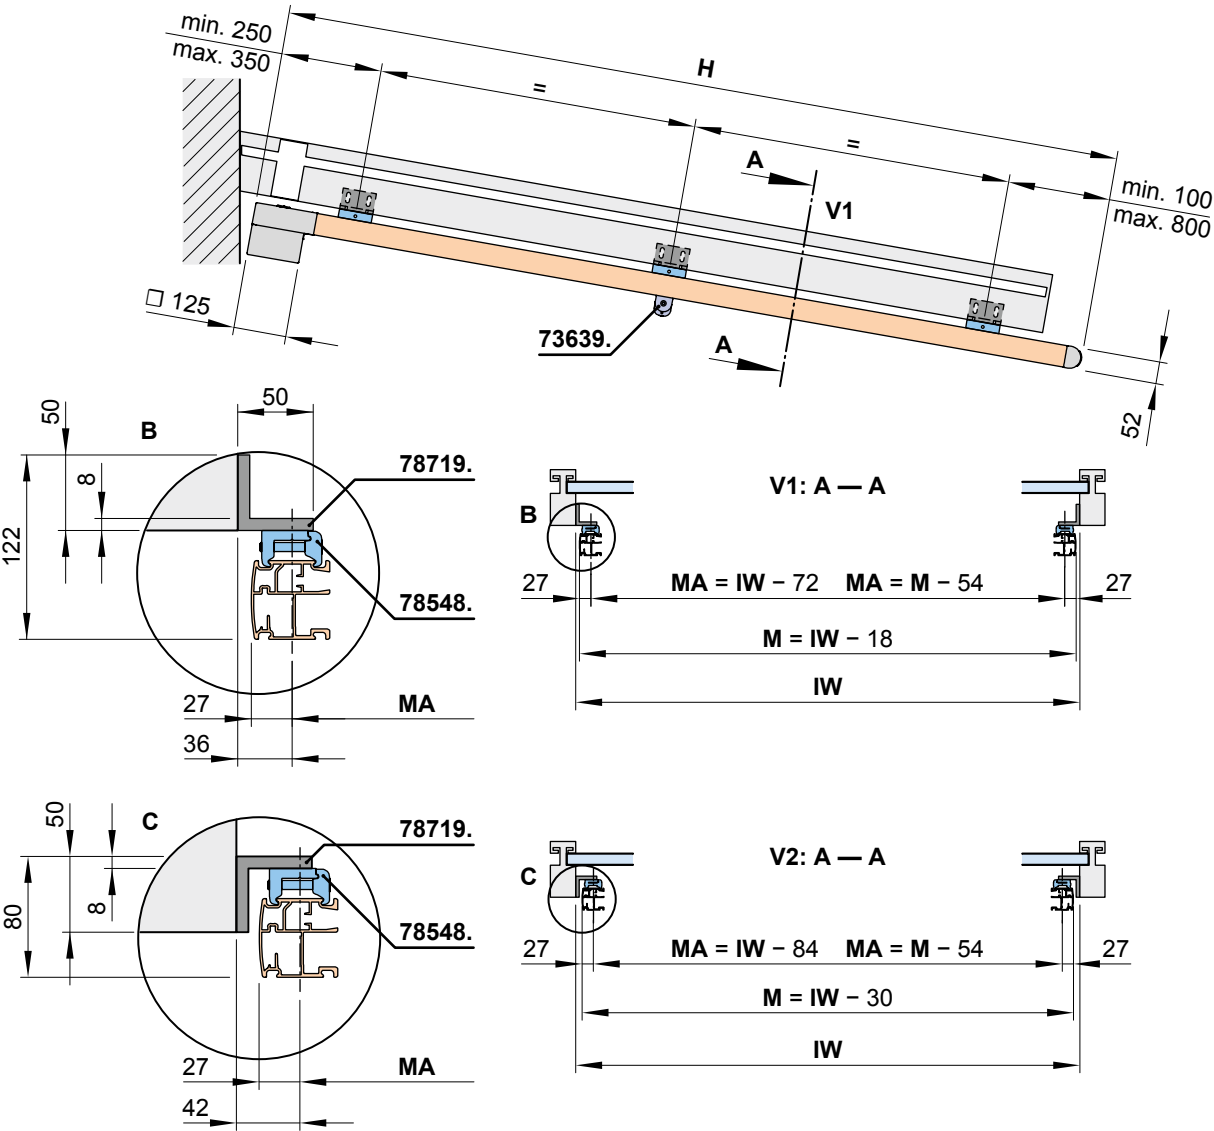

- H** = order dimension = extension
- IW** = interior conservatory dimension
- M** = overall awning width
- MA** = order dimension = awning fixture width = fixture width
- V1, V2** = variants

dimensions in mm


Dimension overview fixture types 20, 21, 22

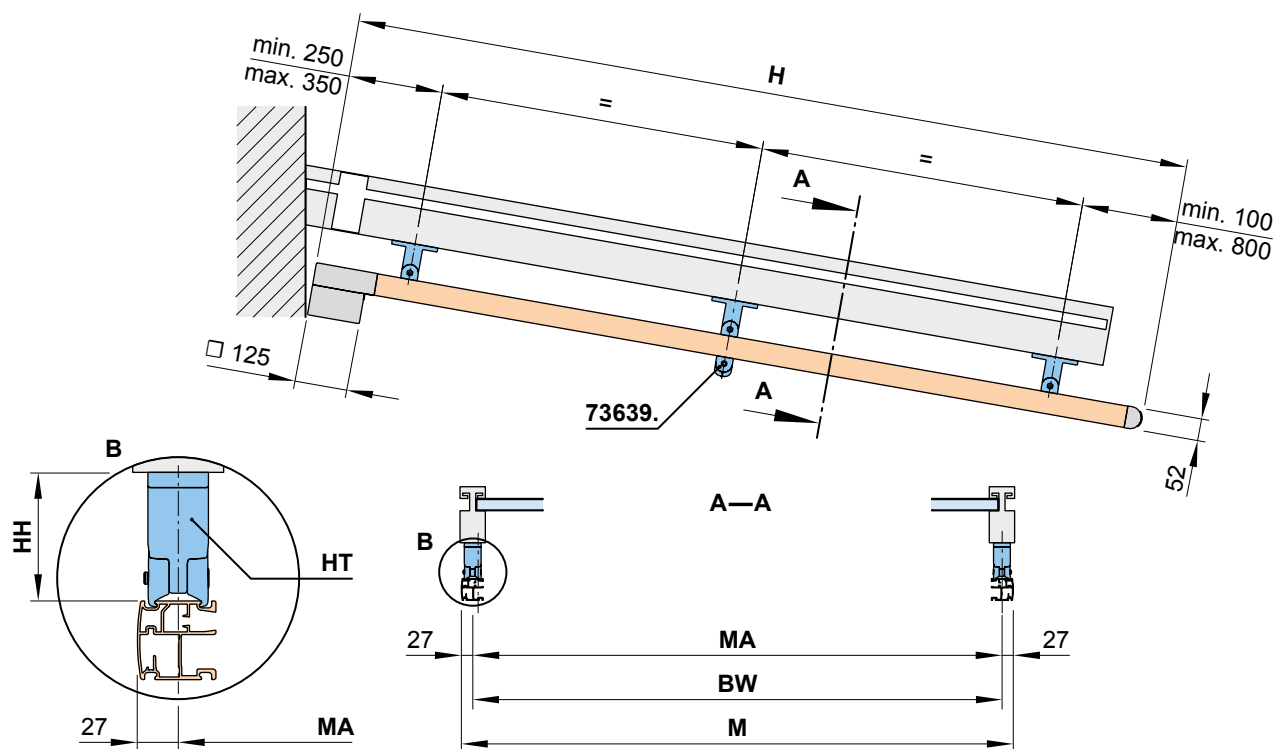

- BW** = width between fixture points on the conservatory
H = *order dimension* = extension
HH = bracket height (for dimensions please refer to "Dimension overview")
HT = bracket
M = overall awning width
MA = *order dimension* = awning fixture width = fixture width

dimensions in mm


Dimension overview, shadeplus

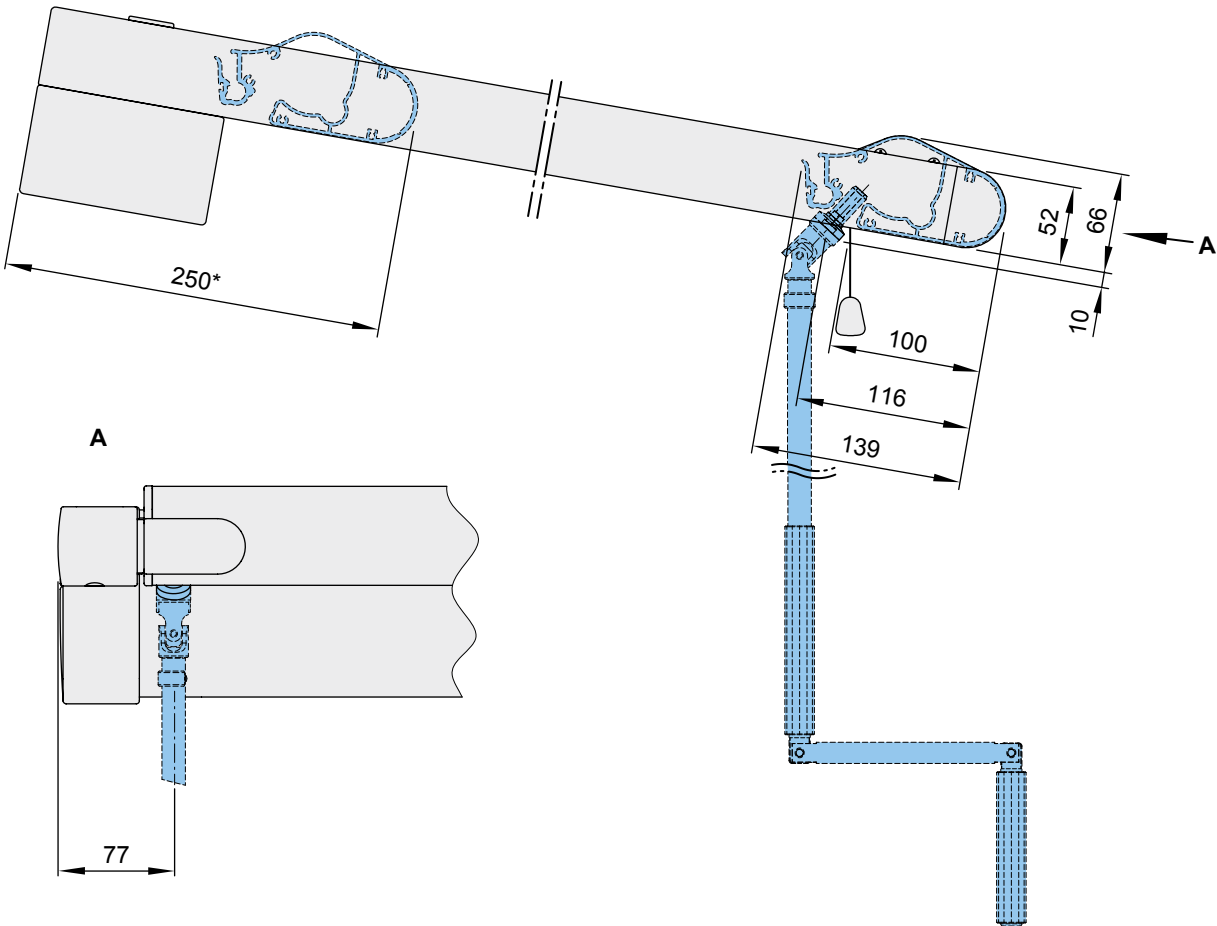


* = depth of cassette and front profile when the awning is retracted

dimensions in mm

Gearbox crank handle position

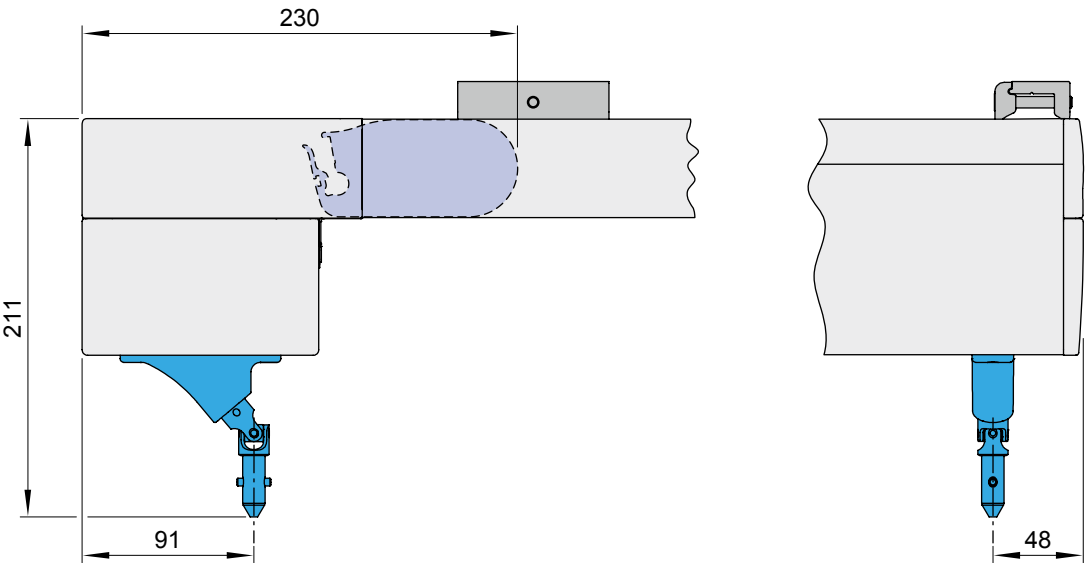

Motor cable exit point

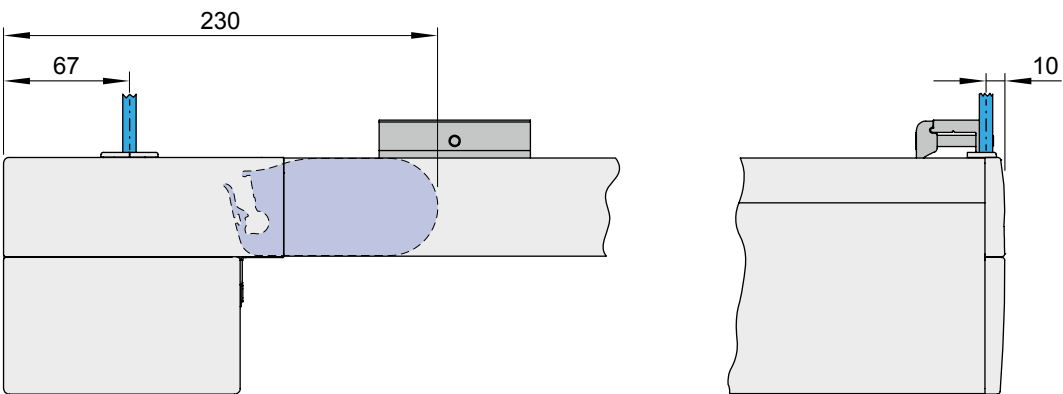


dimensions in mm


Dimension overview lighting options

Option 6: LED-Spots in the guide tracks, electronic components in the cover support tube

Option 7: LED-Spots in the cover support tube and LED-Line in the guide tracks, electronic components in the cover support tube

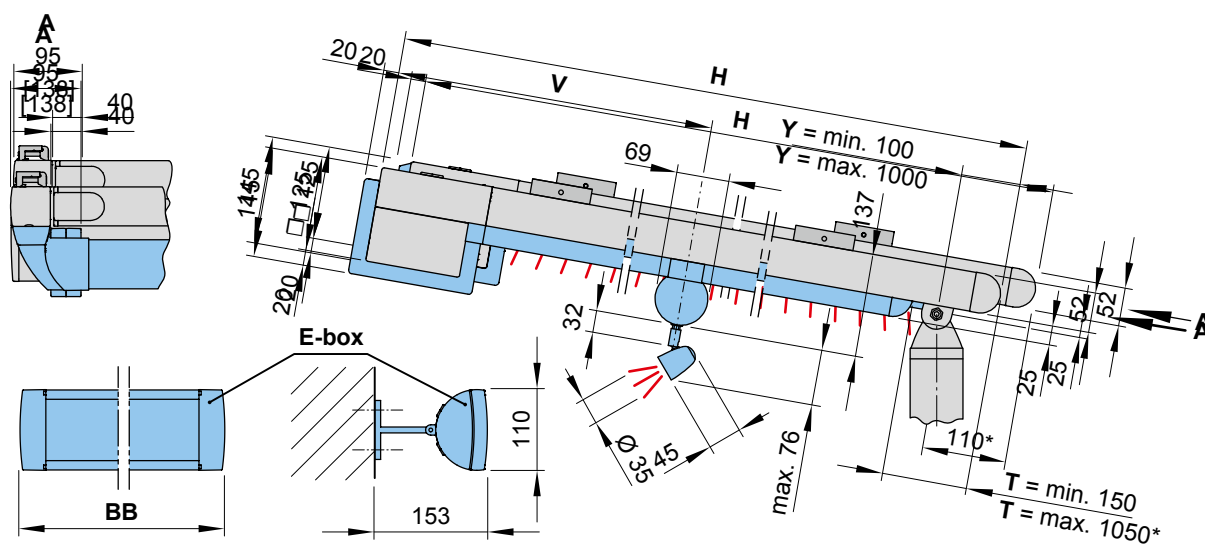

Option 1a (from an extension of 401 cm): LED-Line in the guide tracks, stainless steel cover support wires, electronic components in an E box

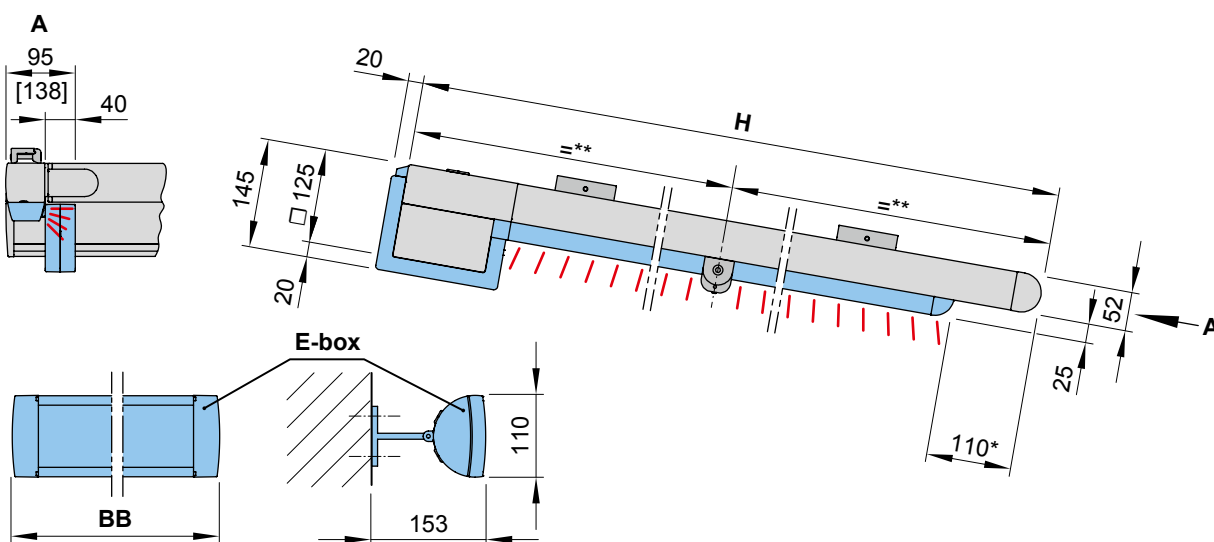

* = 110 mm standard, 36 mm optional

** = cover support wire centred (standard), other positions are possible on request

[...] = for shadeplus and lighting

BB = order width

E-box = see "E-box"


H = order dimension = extension

dimensions in mm

Dimension overview lighting options


Option 2: LED-Line in the cover support tube, electronic components in the cover support tube

Option 3: LED-Line in the cover support tube and in the guide tracks, electronic components in the cover support tube

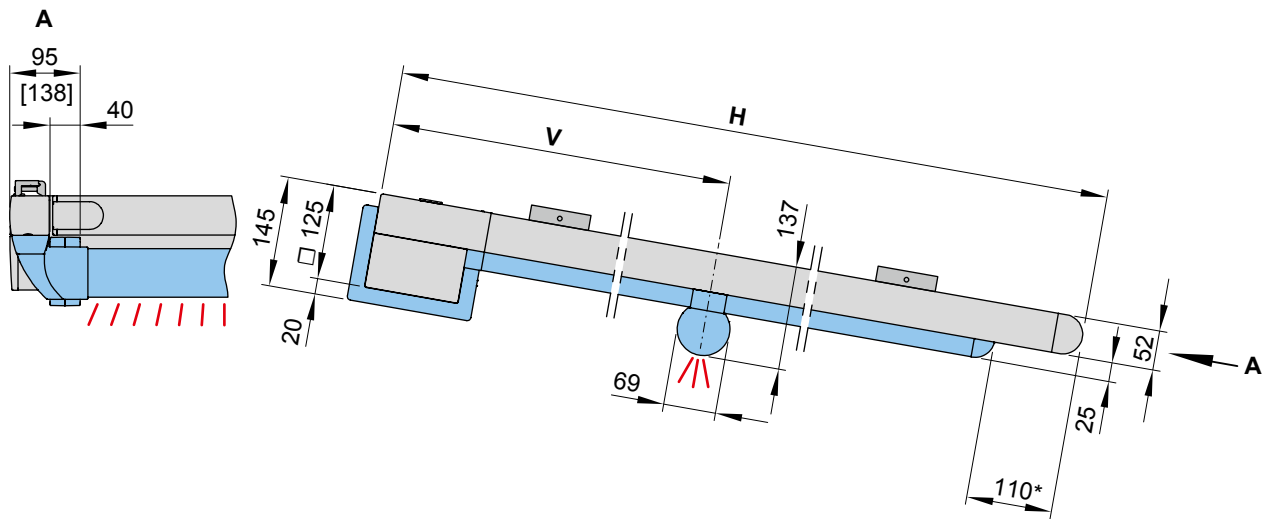

Option 6: LED-Spots in the cover support tube, electronic components in the cover support tube

Option 7: LED-Spots in the cover support tube and LED-Line in the guide tracks, electronic components in the cover support tube

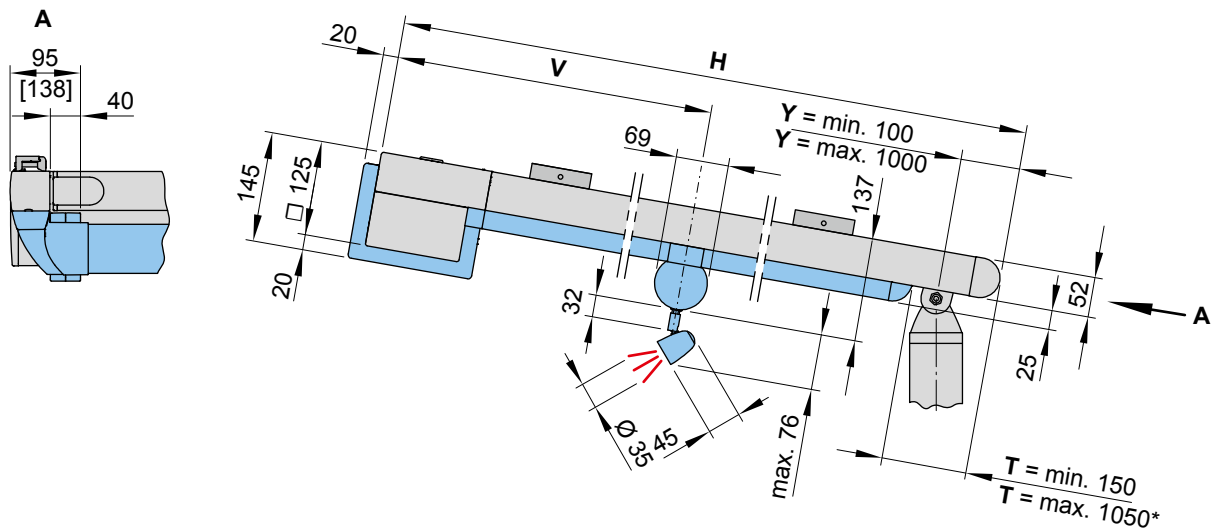

* = 110 mm standard, 36 mm optional

[...] = for shadeplus and lighting

V = lighting position from back of cassette. Standard: centred ($V = H \div 2$).


Optionally this can be stipulated when ordering ($V \text{ min.} = 500 \text{ mm}$, $V \text{ max.} = H - 500 \text{ mm}$)

H = *order dimension* = extension


dimensions in mm

Dimension overview lighting options

Option 10: LED-Spots in the cassette (can be combined at will with options 1-9), electronic components in an E box or in the cover support tube

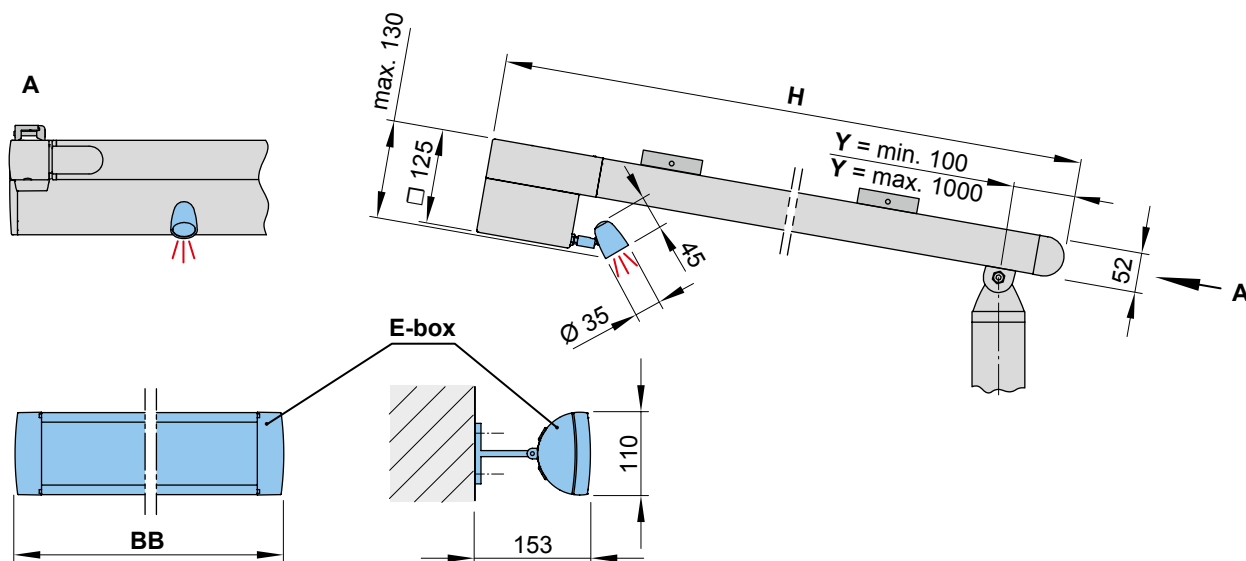

Option 11: LED-Line recessed into the cassette (can be combined at will with options 1-9), electronic components in an E box or in the cover support tube

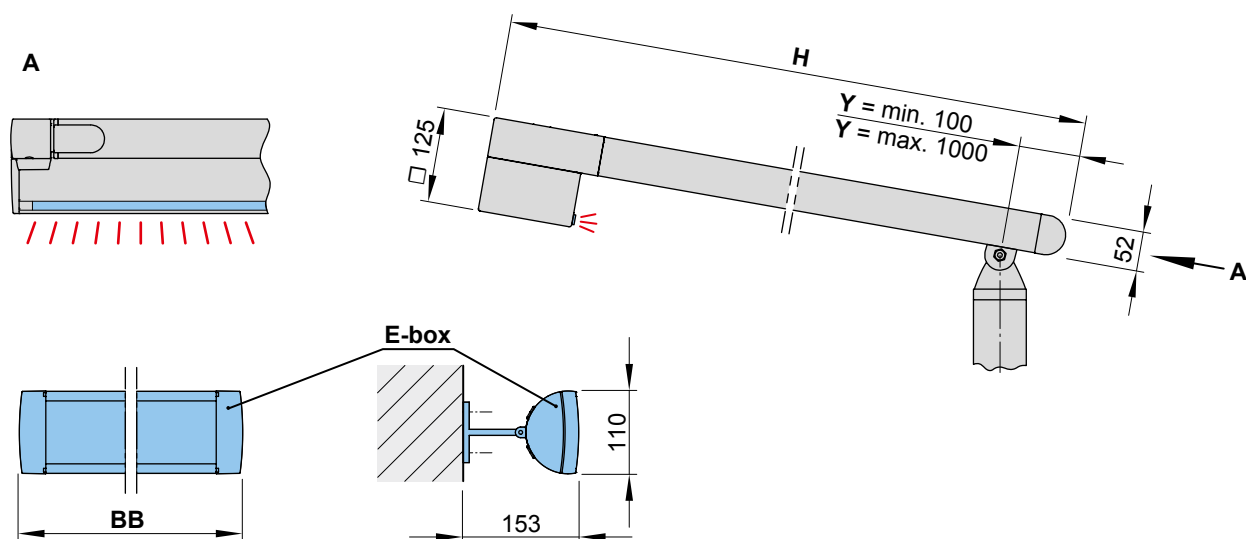

BB = order width


E-box = see "E-box"

H = order dimension = extension

dimensions in mm

E-box

Dimension overview

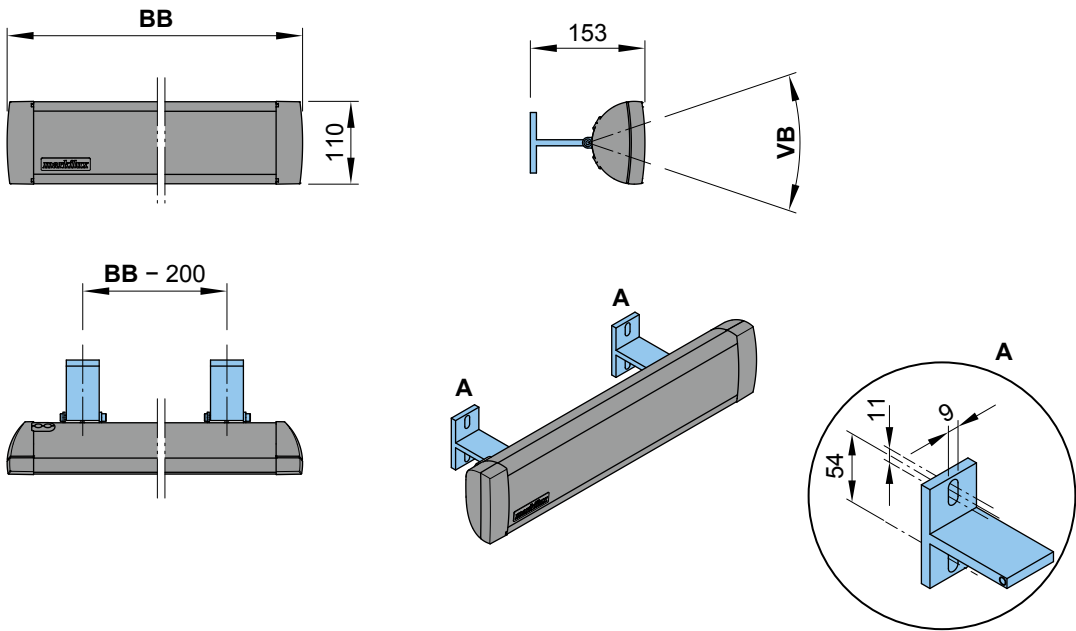

Dimension overview and applications

wireless technology	RTS (433 MHz)		868 MHz io	
	< 330 cm	≥ 330 cm	< 330 cm	≥ 330 cm
extension H				
Lighting options				
LED-Line in the guide tracks with or without cover support wire	E-box M 71850. BB = 500 mm	E-box G 71873. BB = 700 mm	E-box M 71850. BB = 500 mm	
LED-Spots attached to the cassette or LED-Line recessed into the cassette	E-box M 71850. BB = 500 mm			
LED-Line below the guide tracks and LED spotlights attached to or LED-Line recessed into the cassette	E-box G 71873. BB = 700 mm	E-box L 71874. BB = 1200 mm		

for independent use

E-box I 71851.BB = independent use


BB = order width

VB = adjustment range

dimensions in mm

Dimensions for taking measurements

Awning without lighting

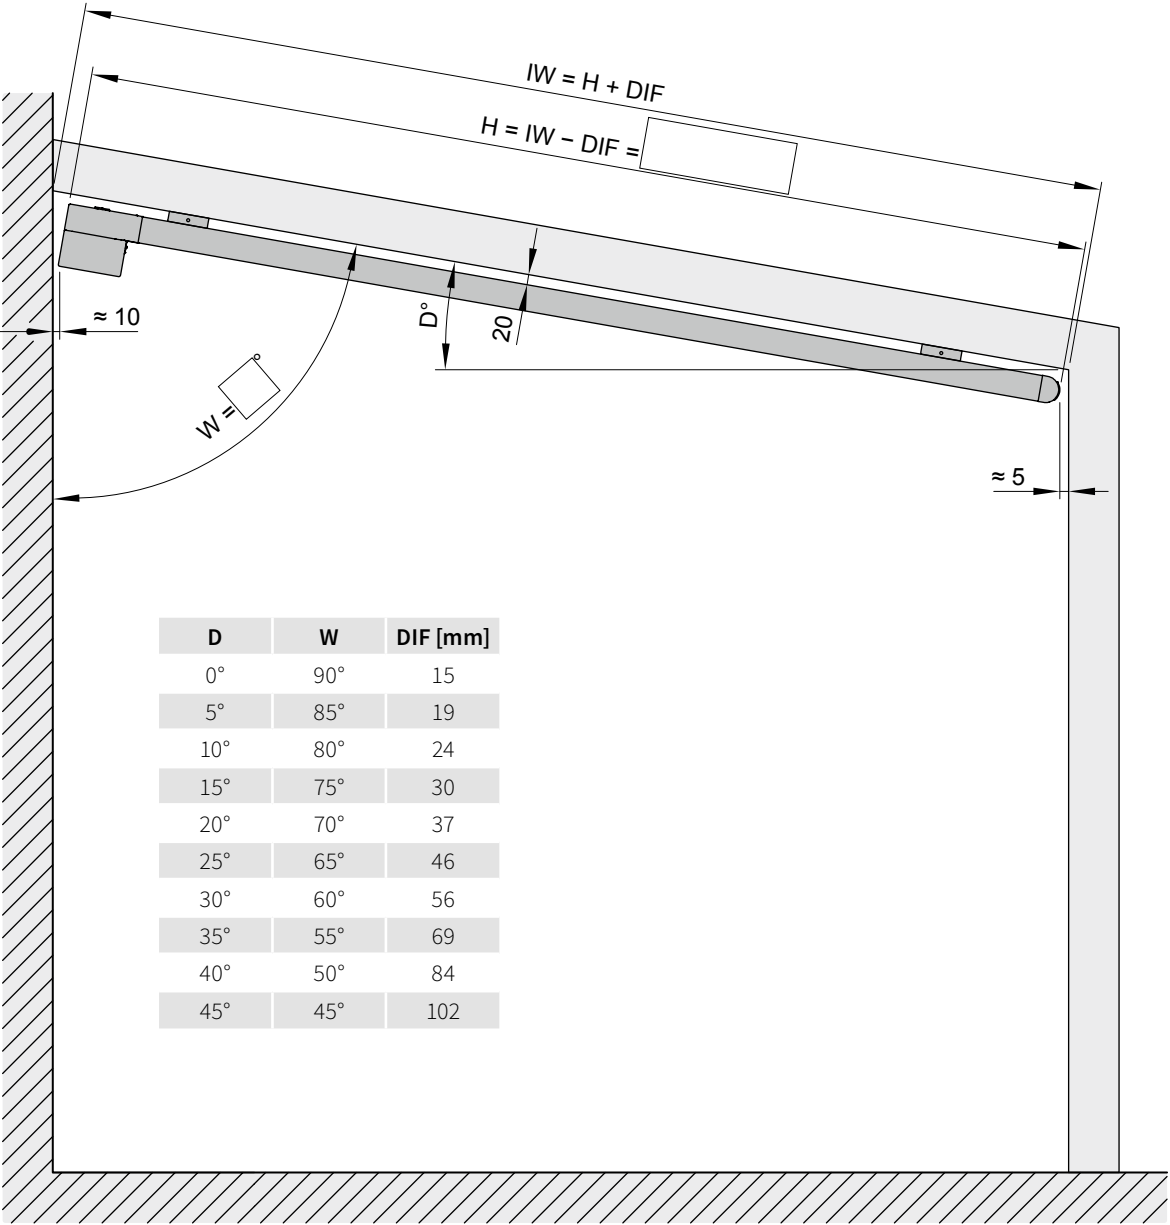


Orders are to be submitted with all the dimensions shown in the diagram!

- D** = roof pitch (in °)
 - DIF** = difference interior conservatory measurement to extension H
 - H** = **order dimension** = nominal extension = $IW - DIF$ (see table)
 - IW** = interior conservatory dimension
 - W** = awning pitch (in °)
- dimensions in mm

Dimensions for taking measurements

Awning with lighting

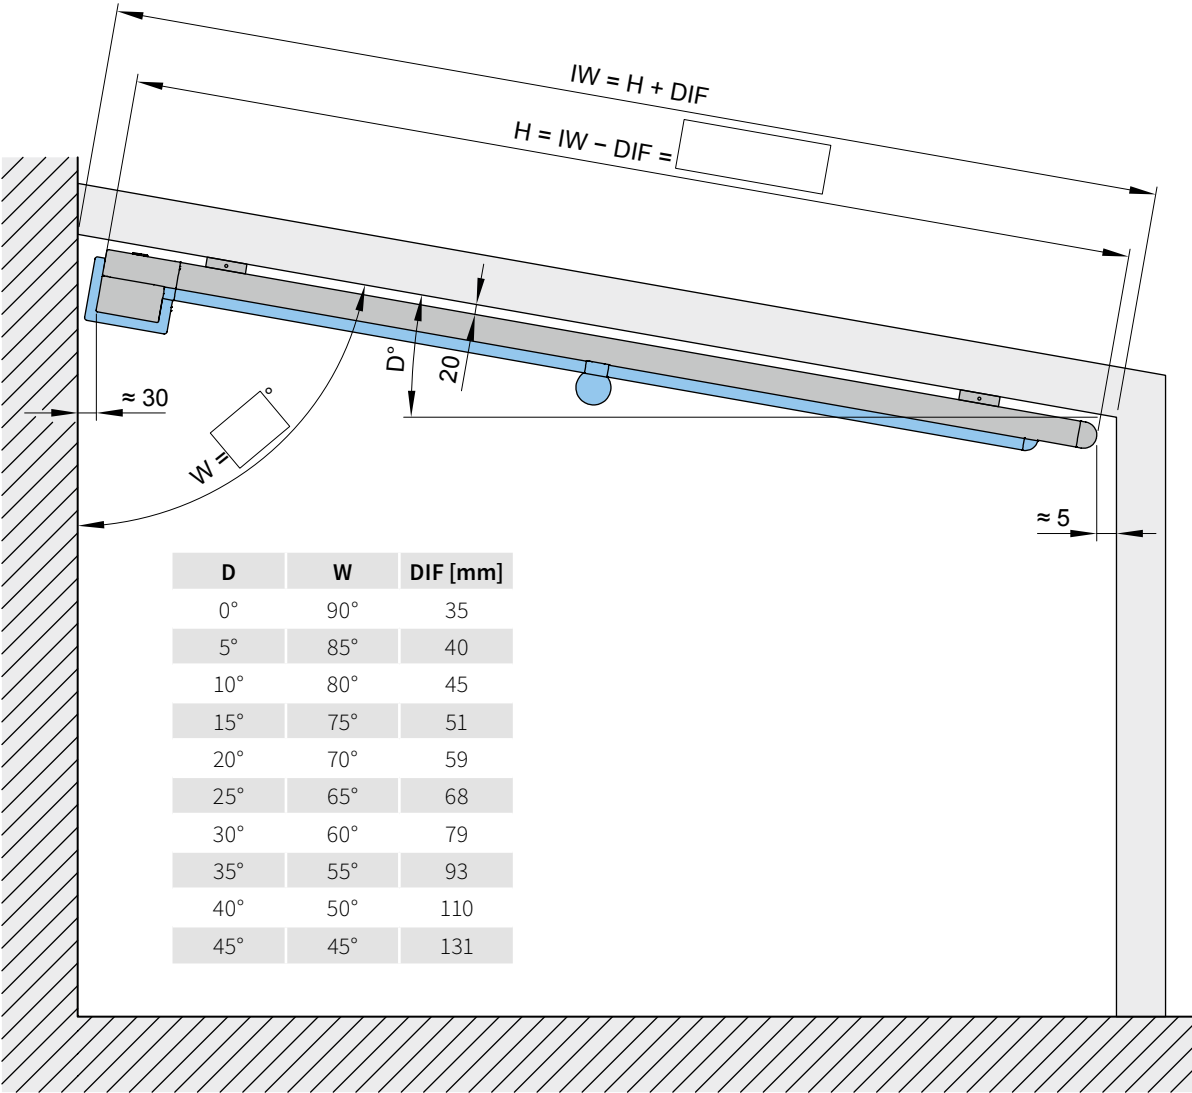

Orders are to be submitted with all the dimensions shown in the diagram!

- D = roof pitch (in °)
- DIF = difference interior conservatory measurement to extension H
- H = **order dimension** = nominal extension = IW - DIF (see table)
- IW = interior conservatory dimension
- W = awning pitch (in °)

dimensions in mm

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18**
- 19
- 20